

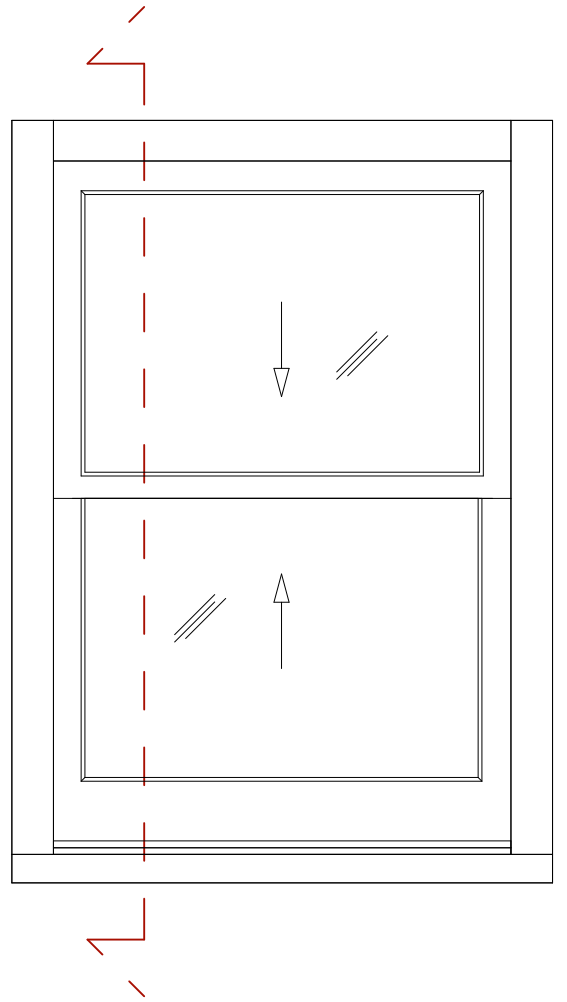
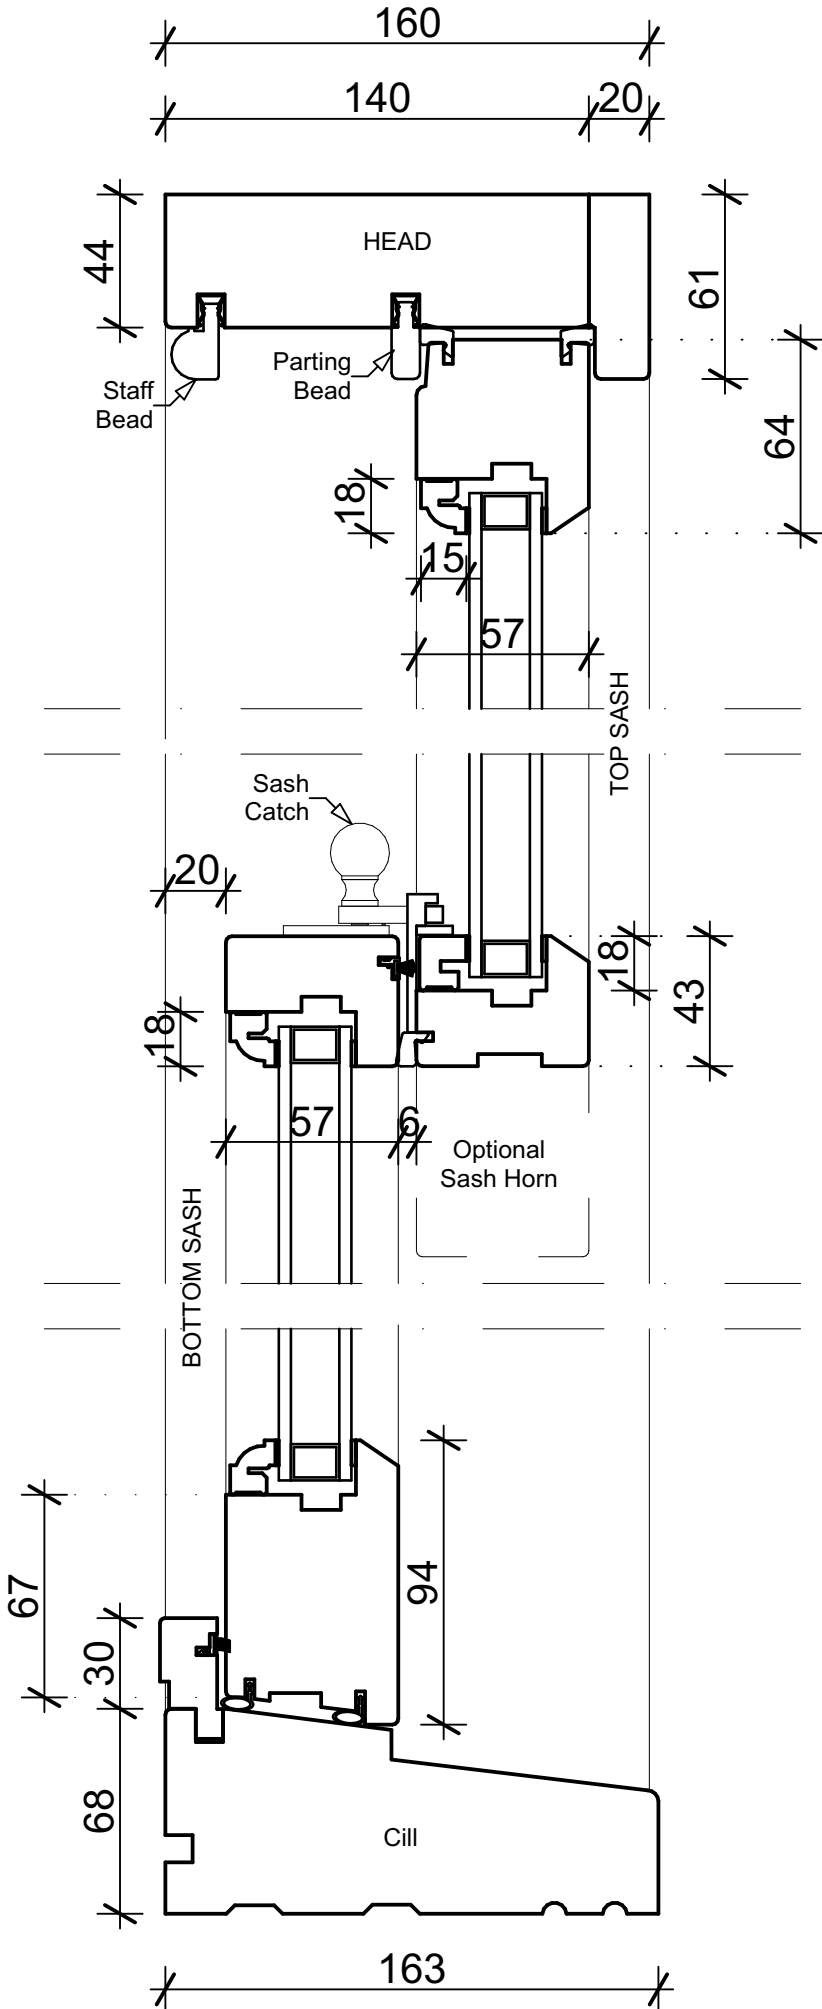
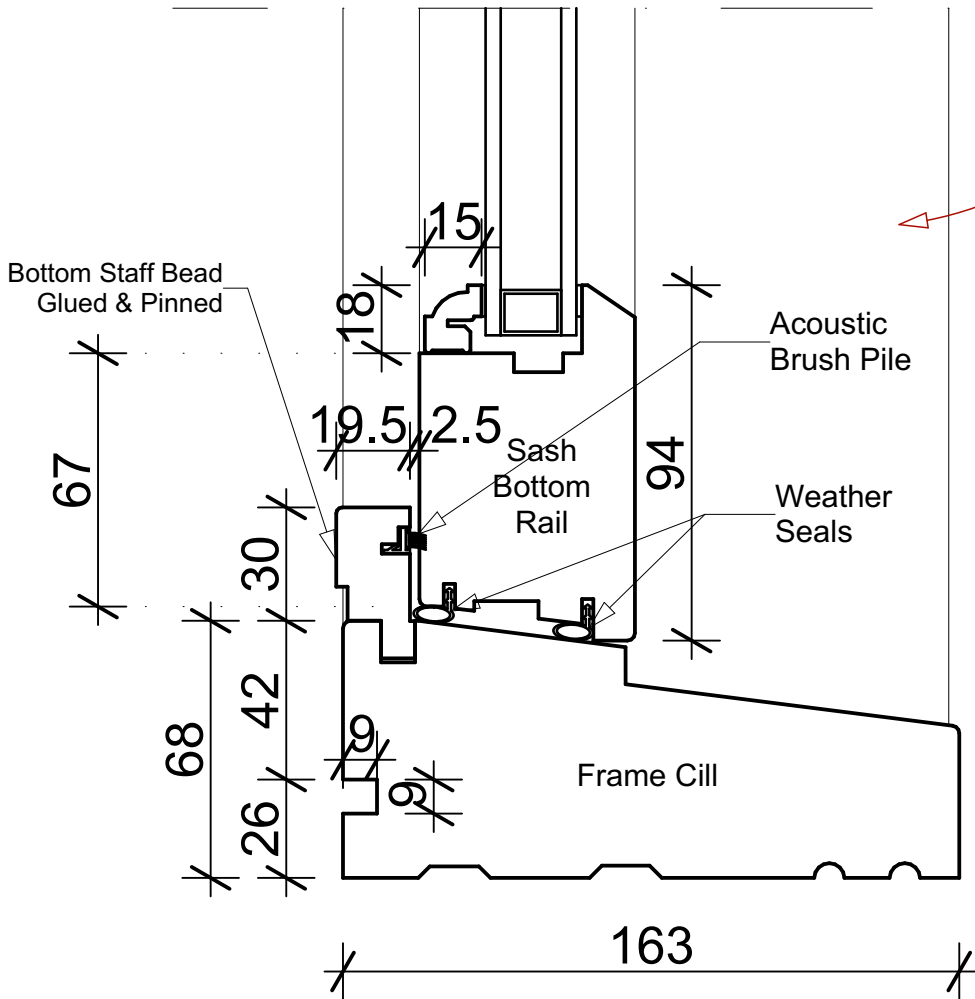


# Spring Sash Window Section

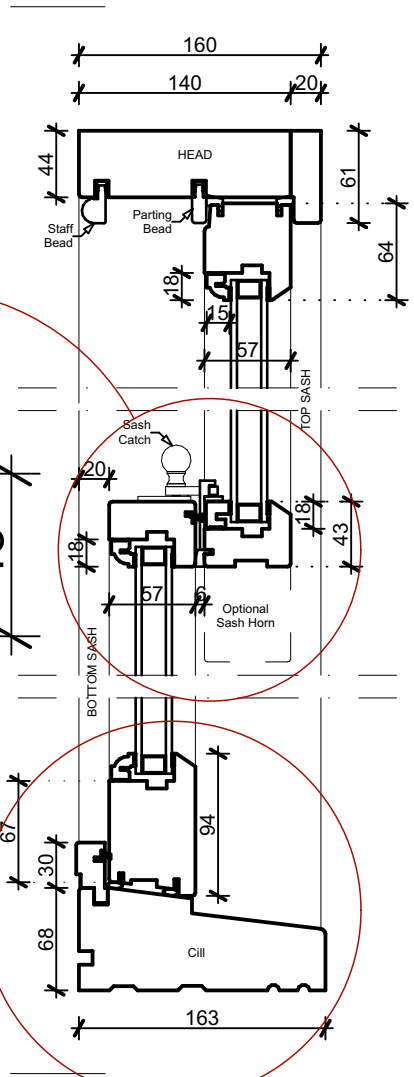


Cill and Meeting Rails Detail

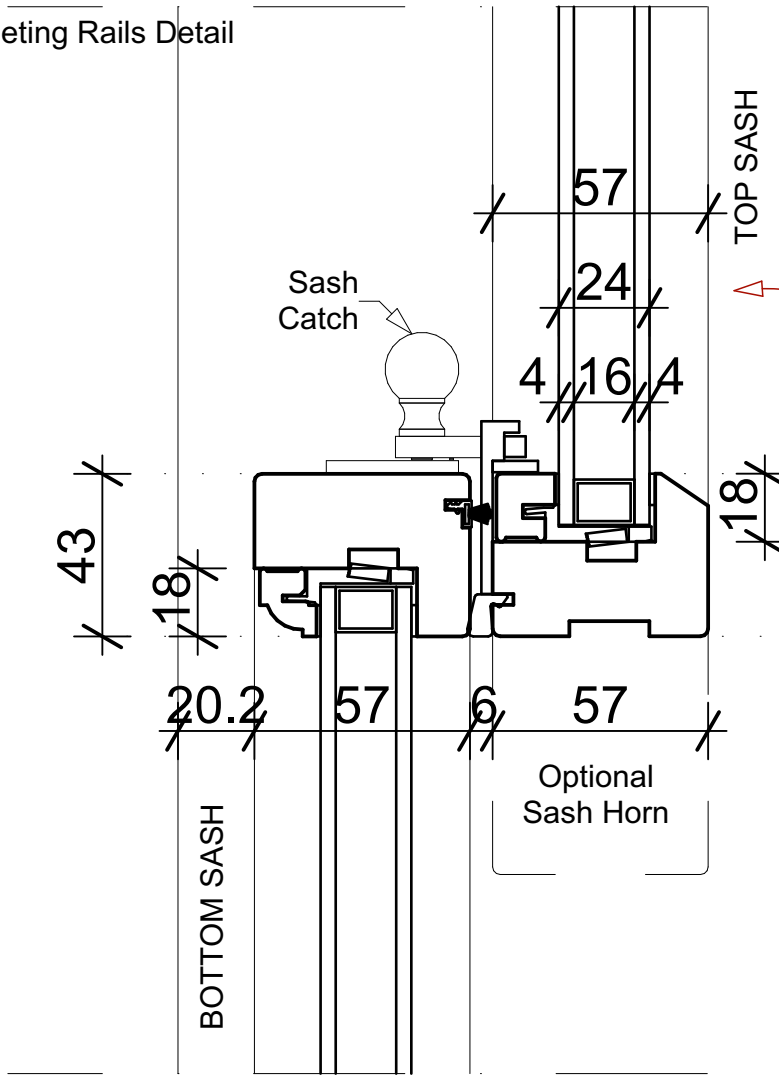

40.4



Window Board groove as standard  
Optional no Window Board groove

Jamb Section

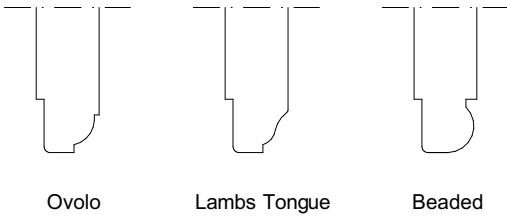


Ovolo      Lambs Tongue      Beaded

External Liners can be Square Profile as shown, Ovolo, Lambs Tongue or Beaded

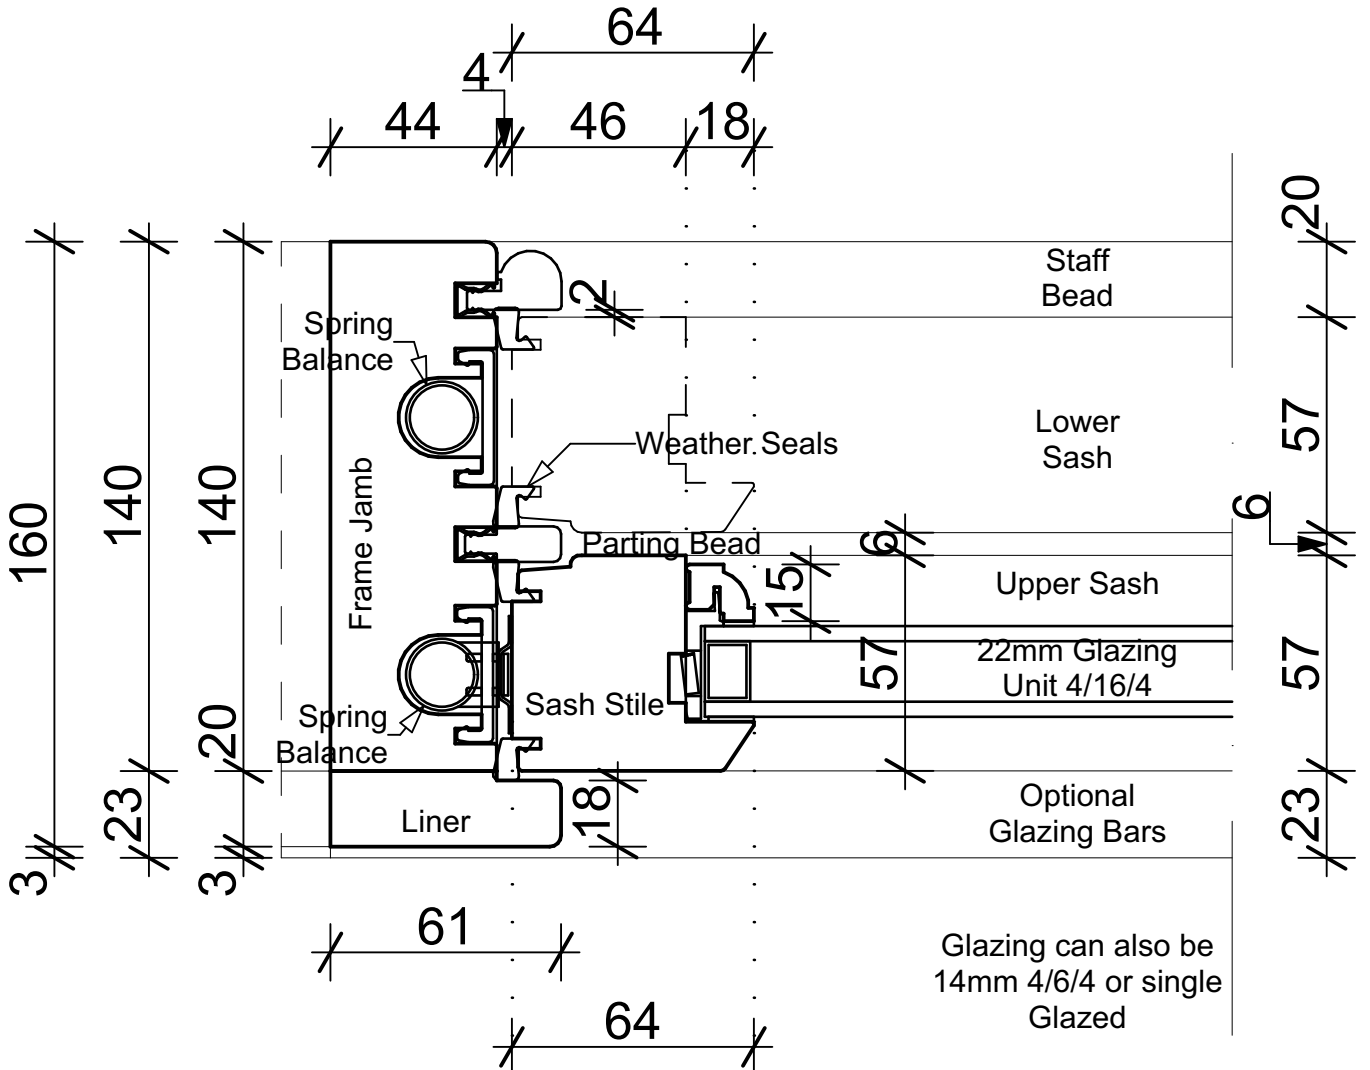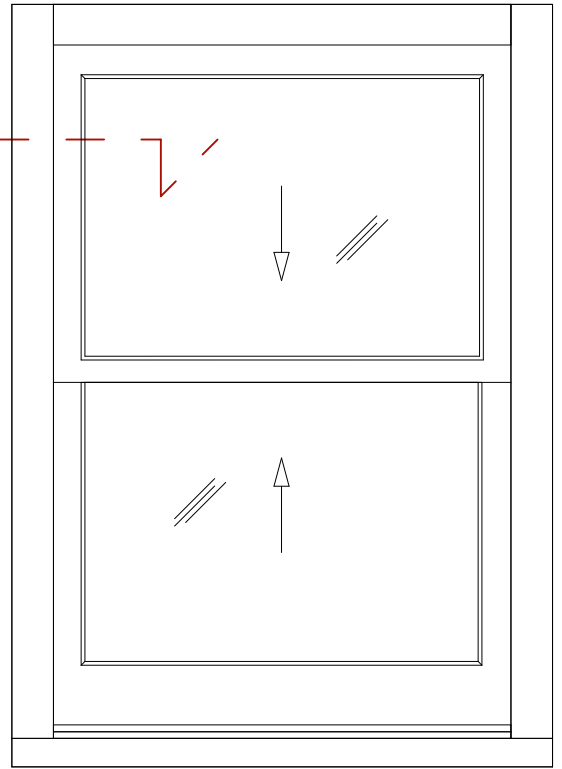

Sash Restrictor Locks


If frame width is over 1148mm  
locks are fitted to both sides

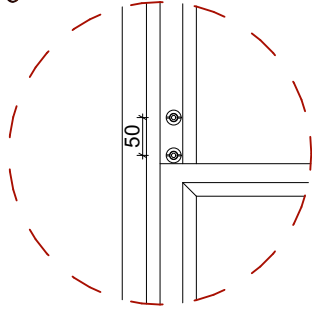


Locks 50mm apart allows an  
opening of 20mm between  
bottom of sash and staff bead

20


O/A Frame width up to  
1148 Locks fitted to one side only

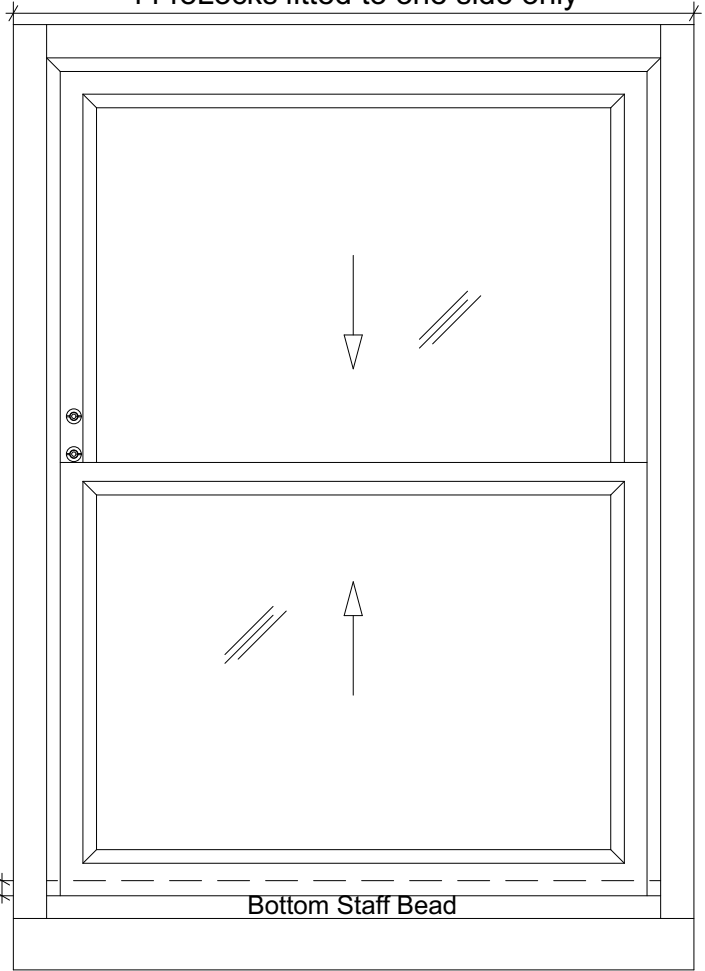

VIEWED FROM INSIDE




BARREL LOCK

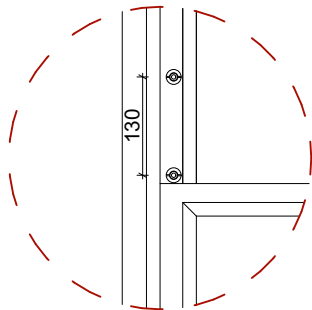

Locks 130mm apart allows an  
opening of 100mm between  
bottom of sash and staff bead


100

O/A Frame width up to  
1148 Locks fitted to one side only

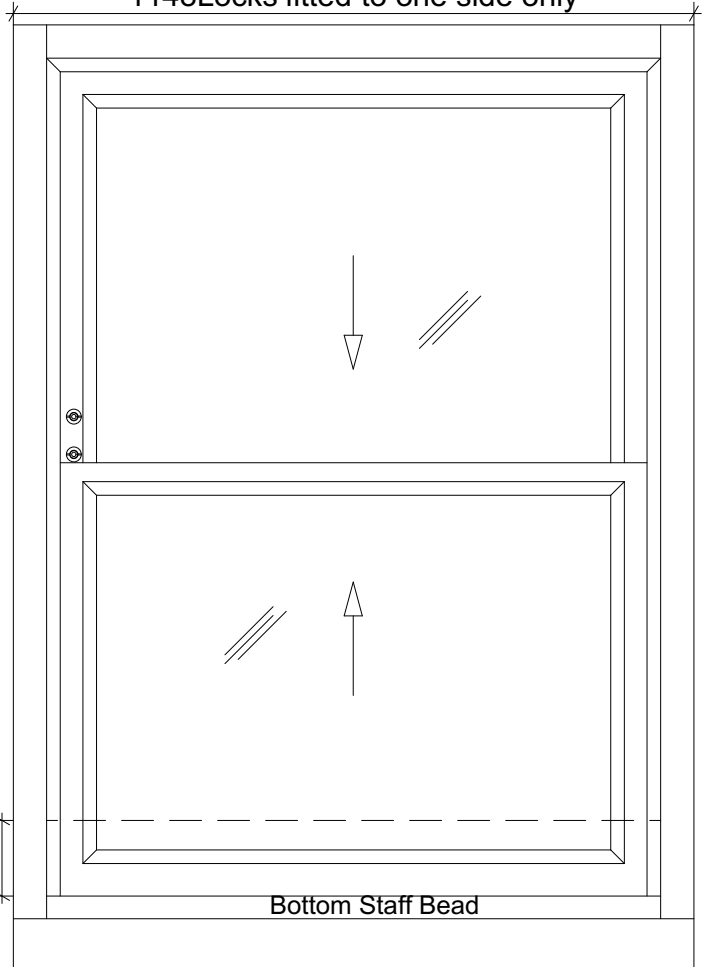


VIEWED FROM INSIDE


### HEAD

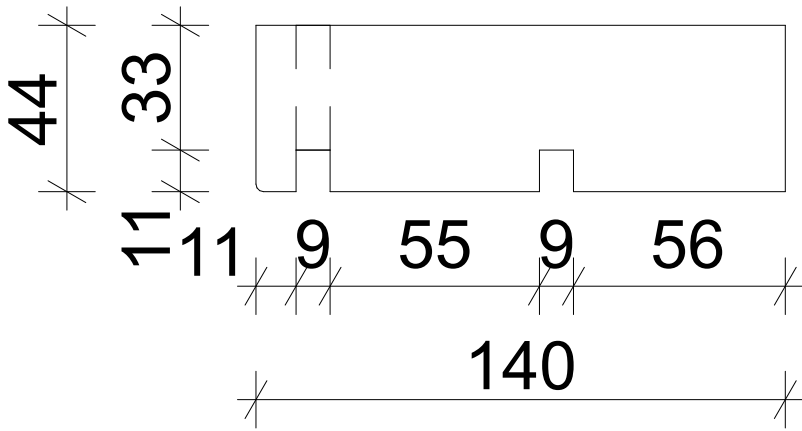


### Liner x2

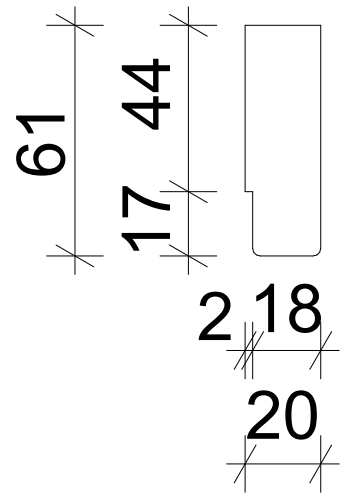

### Frame Jamb x2




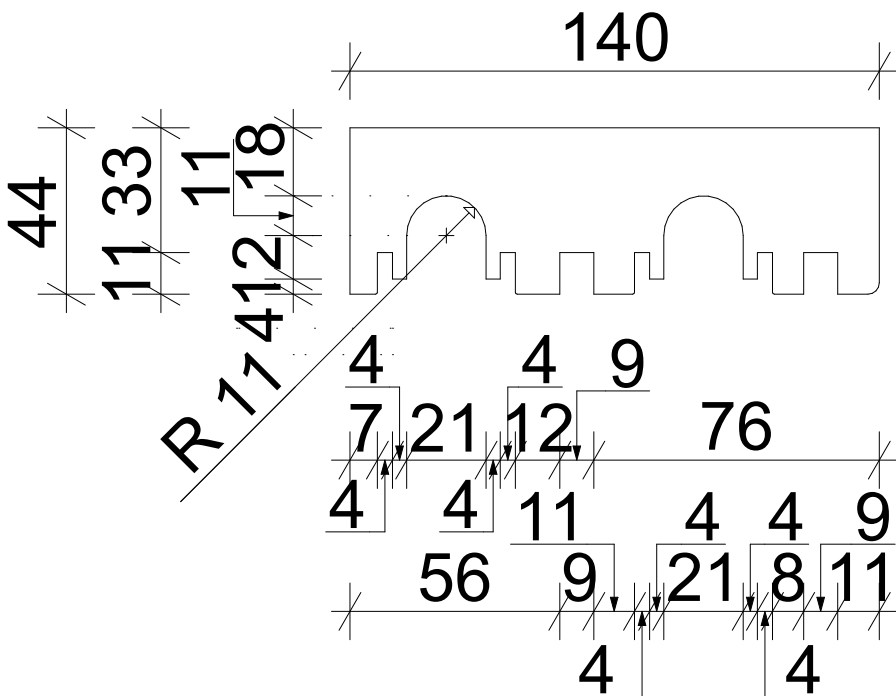




### Parting Bead x3

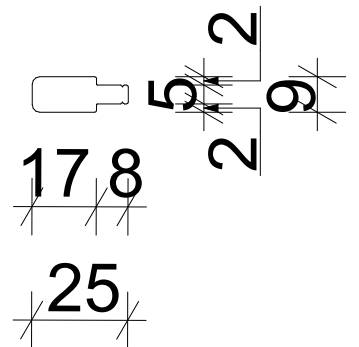




Sash Stile x5

Staff Bead x3

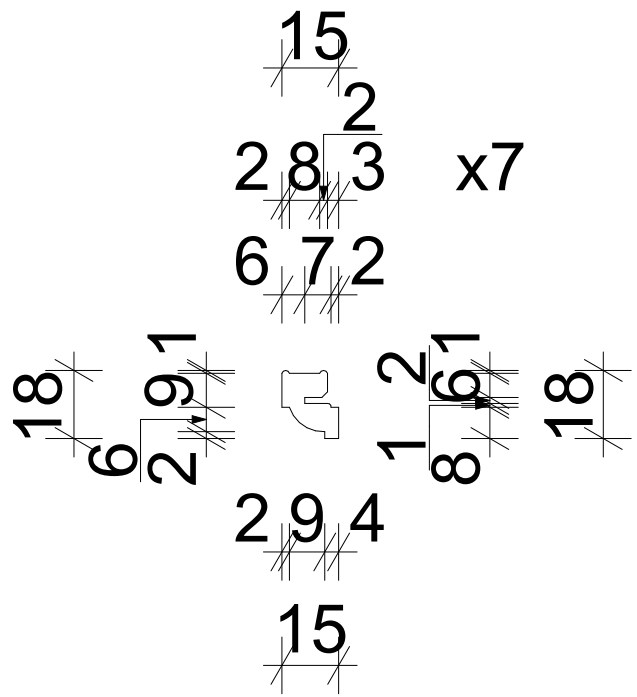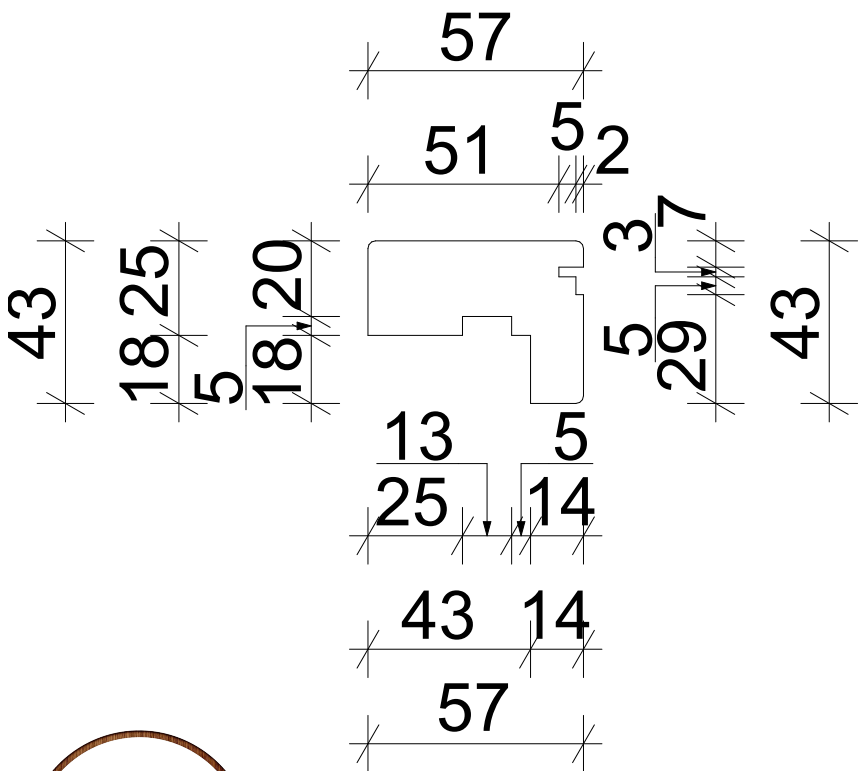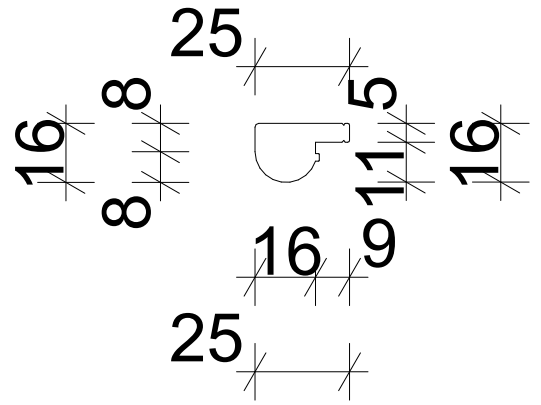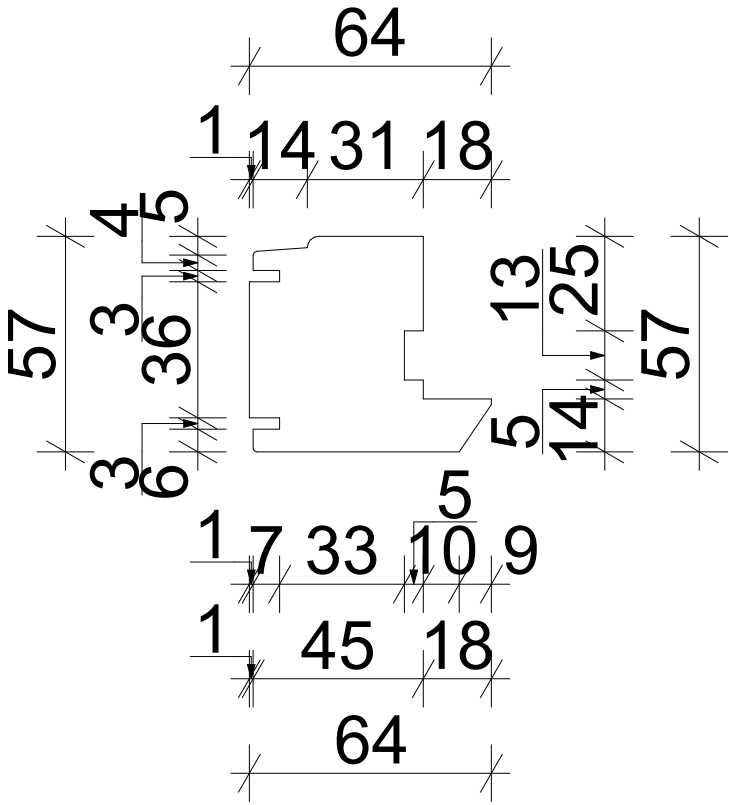

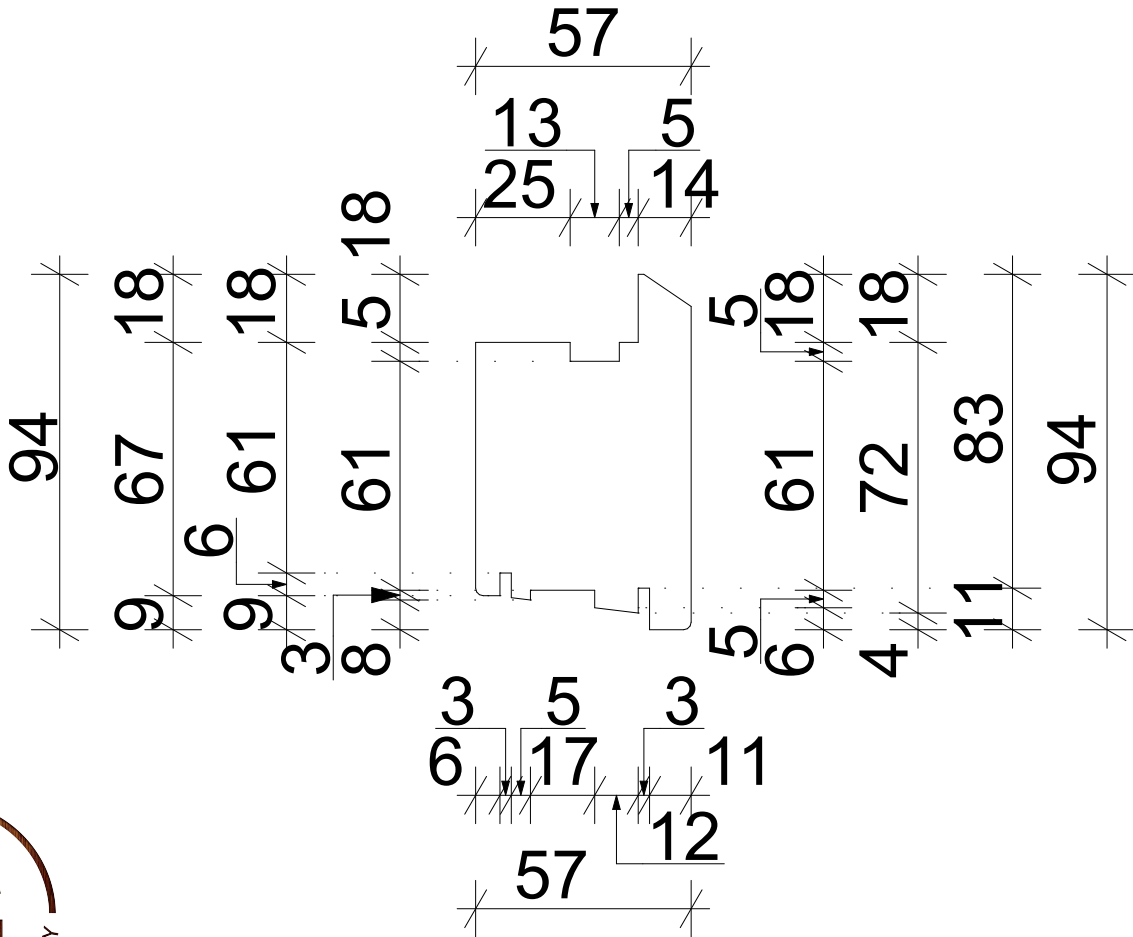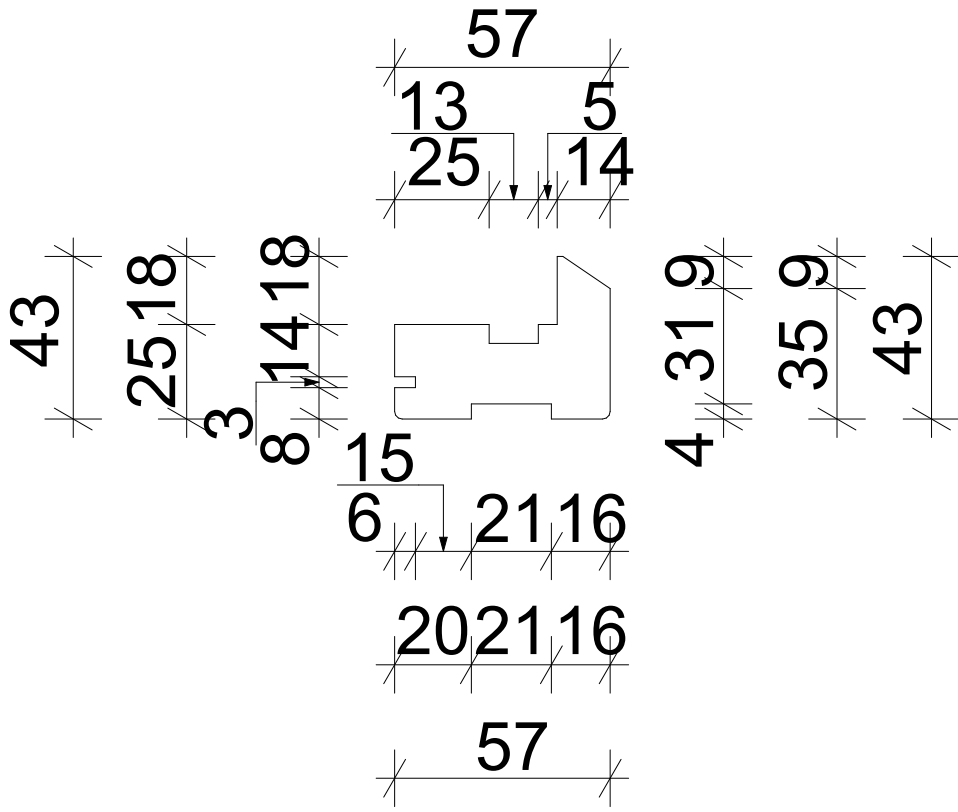

### Bottom Staff Bead Glued & Pinned

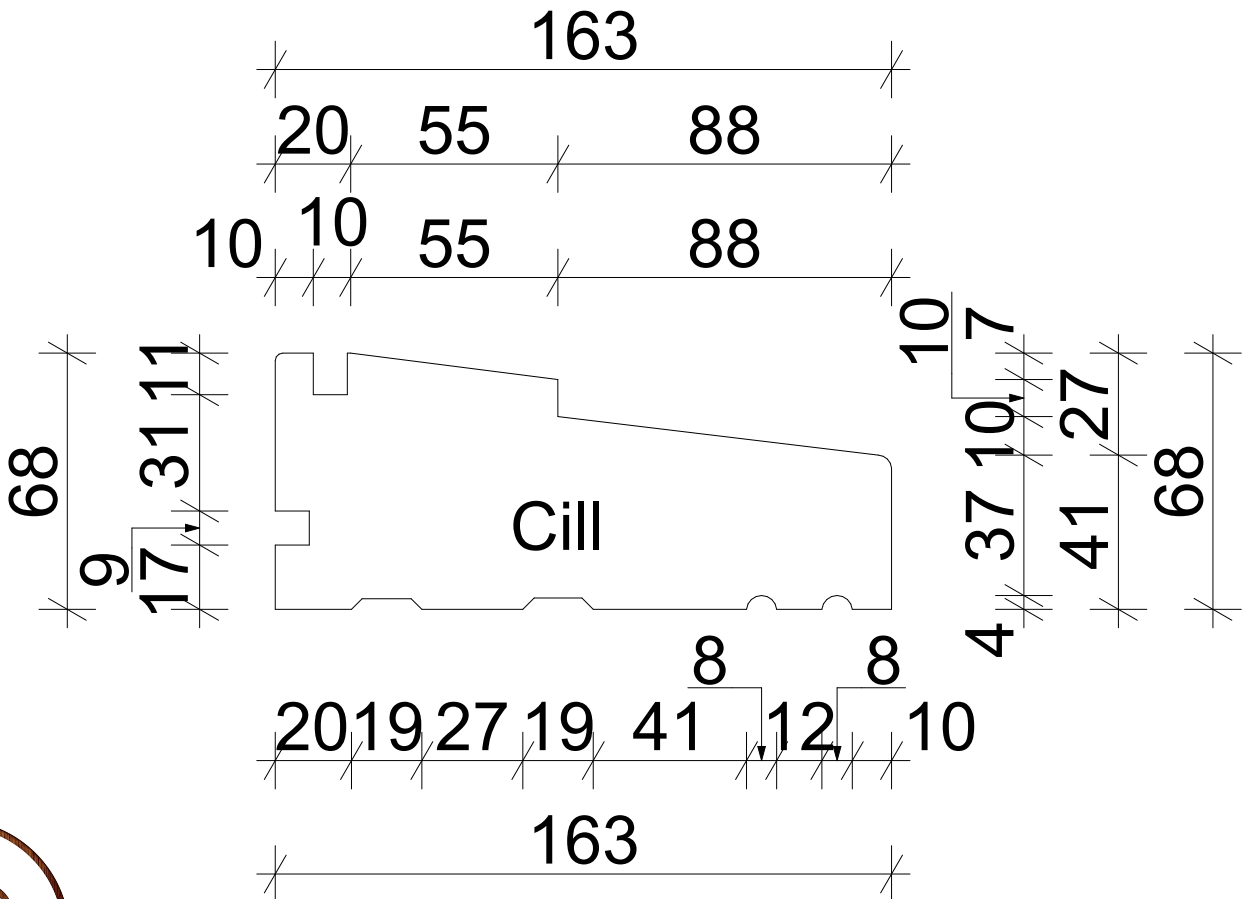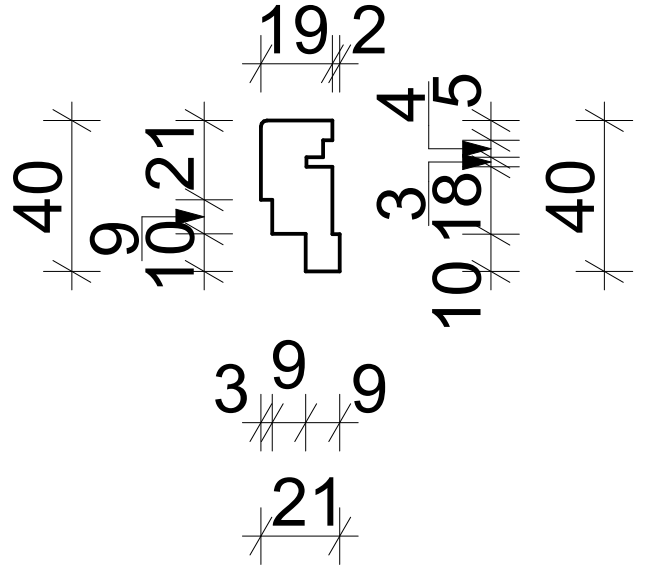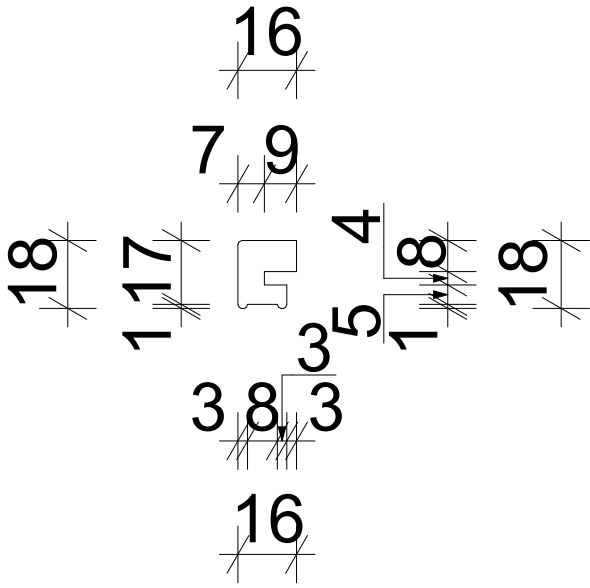



Spring Sash Window 3D

